



4½" Square Push Plate

with Black Surface Mount Box



Installation

- 1) Remove flat head screw at bottom of box and separate back plate from box. Attach back plate to mounting surface using included fasteners.
- 2) Connect top of box to back plate as shown below.
- 3) Swing down and lock in place with bottom screw.

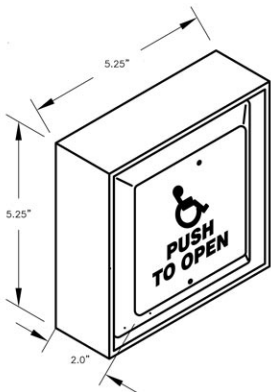

MATERIALS/FINISHES:	BRUSHED STAINLESS STEEL, POLISHED, SATIN OR ANTIQUE BRASS.
CONSTRUCTION:	STAINLESS STEEL STUDS FURNISHED STANDARD NOISE DAMPENING RUBBER CUSHIONING WASHERS
LOGO/LETTERS:	BLUE WITH LOGO, BLACK WITH WORDS ONLY (CE-636)
SWITCH:	UL/CSA LISTED SPDT (DPDT AVAILABLE)